



## CHARACTERISTIC CURVES

Models: HXL8, HXLJ8



Page Number 102-023

Effective Feb 2014

Replaces Oct 2013

Section 102

### 350 RPM

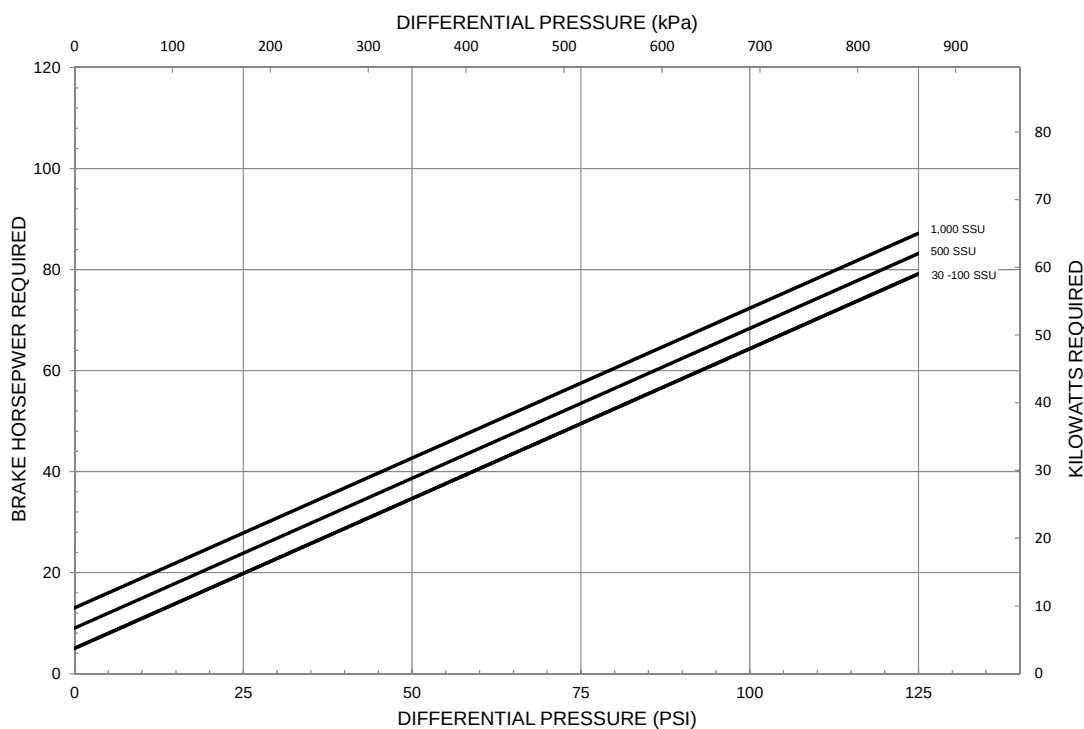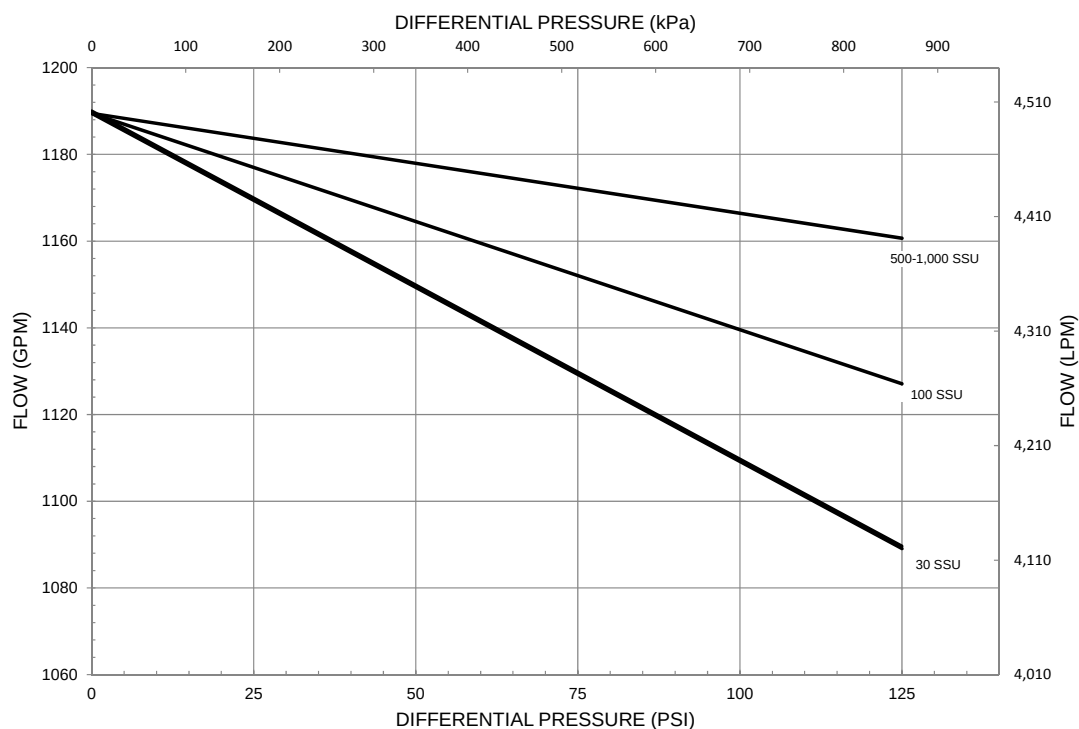



Use metal vanes above 20,000 SSU

Blackmer Characteristic Curves are based on Brake Horsepower (BHP). To determine Motor Horsepower, drive train inefficiencies must be added to the BHP.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

## CHARACTERISTIC CURVES

Model: HXL8, HXLJ8

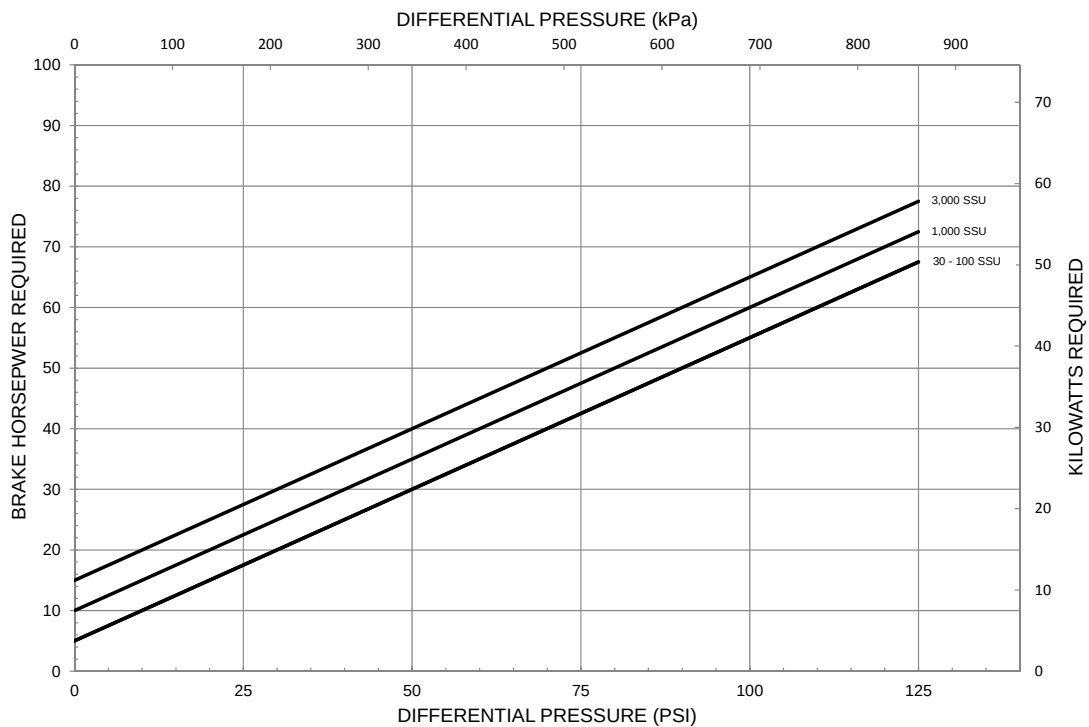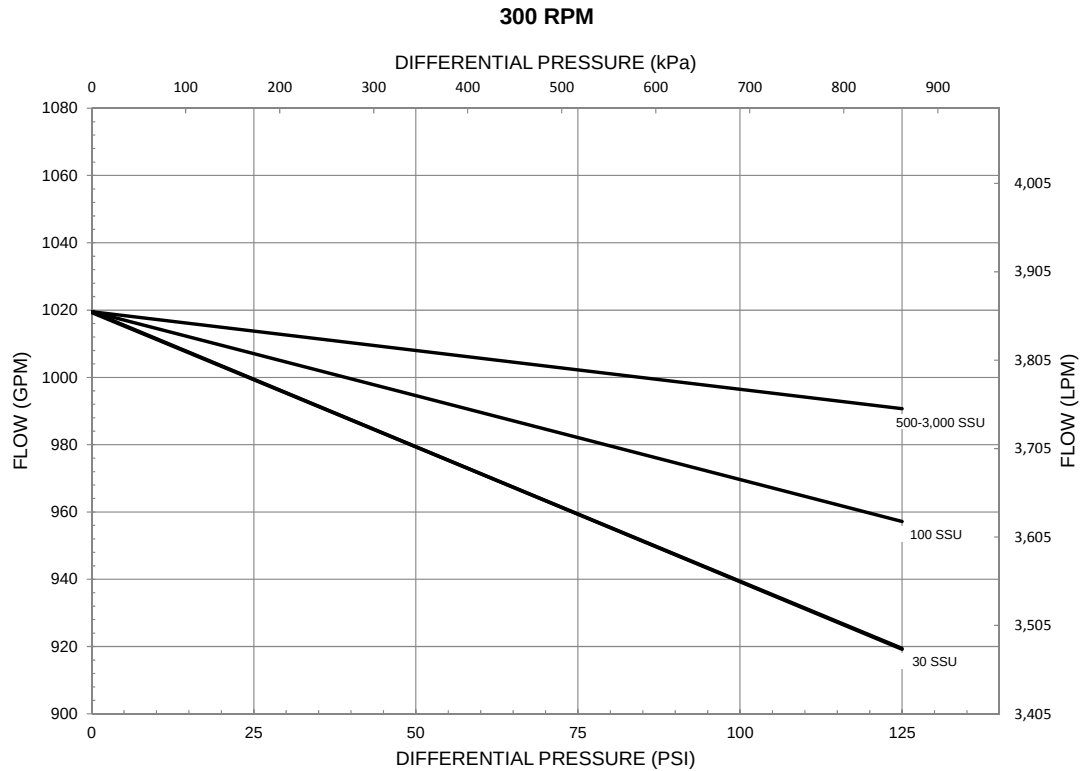

Use metal vanes above 20,000 SSU



Blackmer Characteristic Curves are based on Brake Horsepower (BHP). To determine Motor Horsepower, drive train inefficiencies must be added to the BHP.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.



## CHARACTERISTIC CURVES

Model: HXL8, HXLJ8

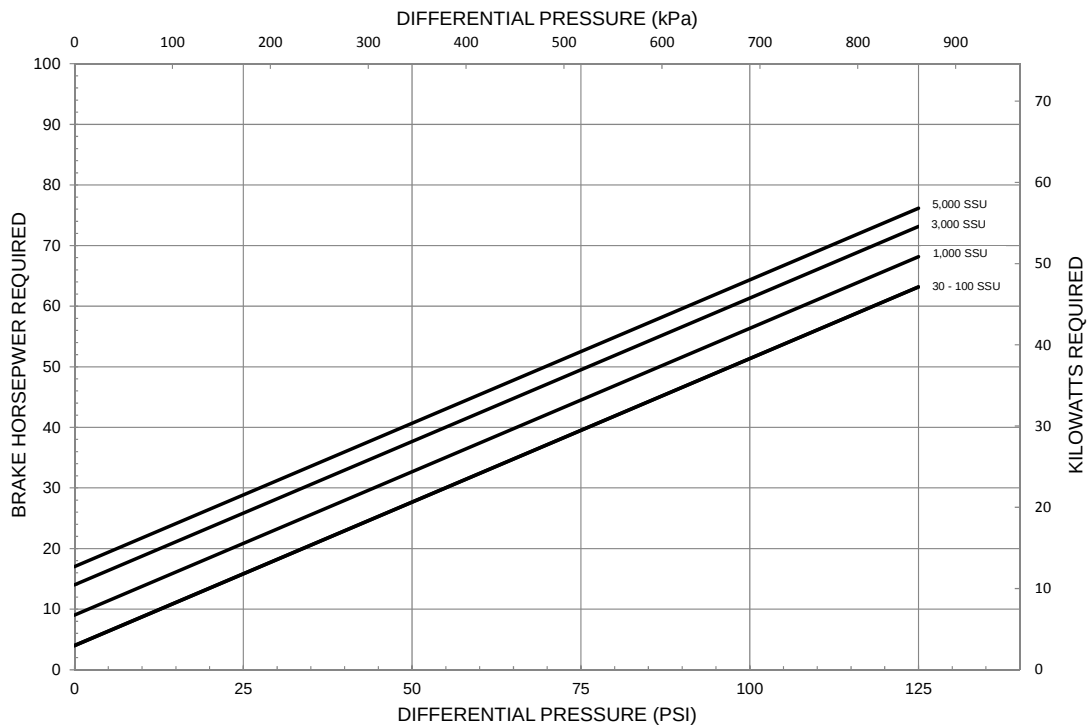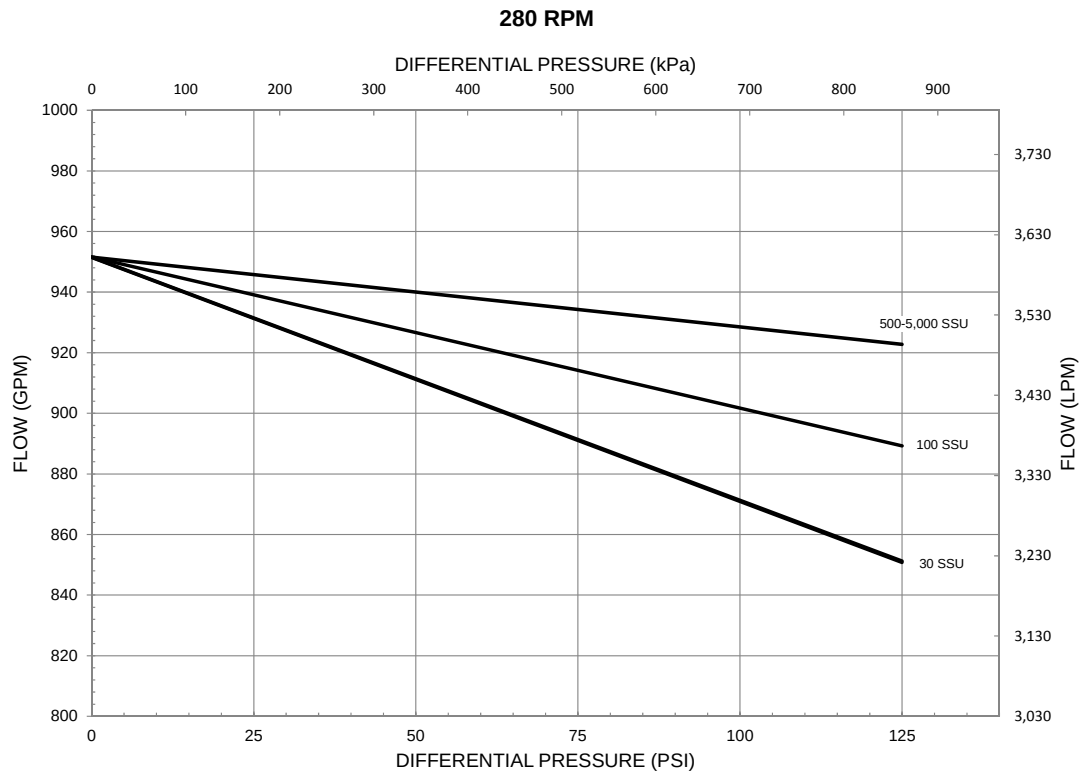

Use metal vanes above 20,000 SSU



Blackmer Characteristic Curves are based on Brake Horsepower (BHP). To determine Motor Horsepower, drive train inefficiencies must be added to the BHP.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.



## CHARACTERISTIC CURVES

Model: HXL8, HXLJ8

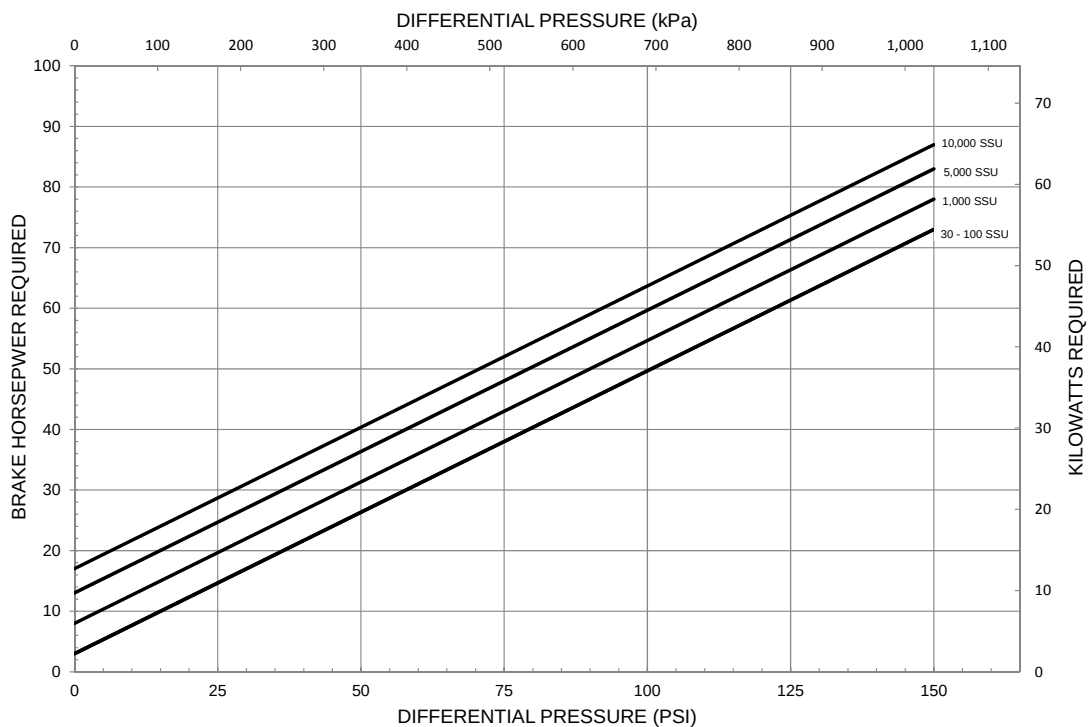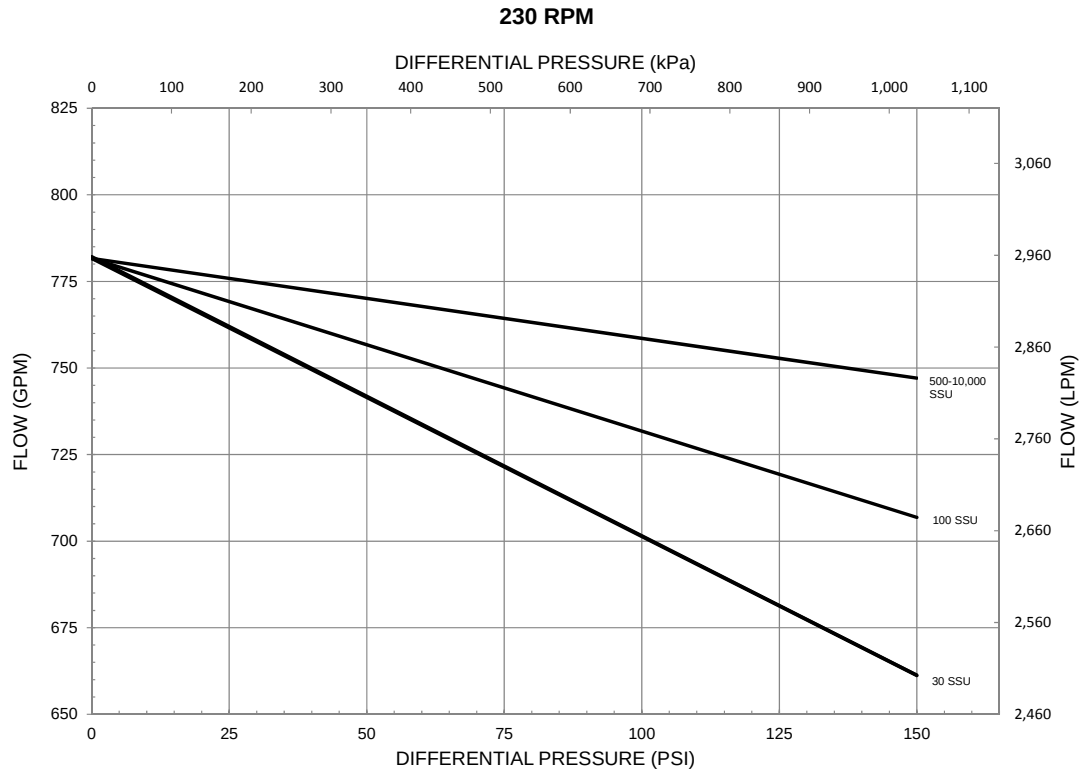

Use metal vanes above 20,000 SSU



Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHP.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.

**Blackmer**

## CHARACTERISTIC CURVES

Model: HXL8, HXLJ8

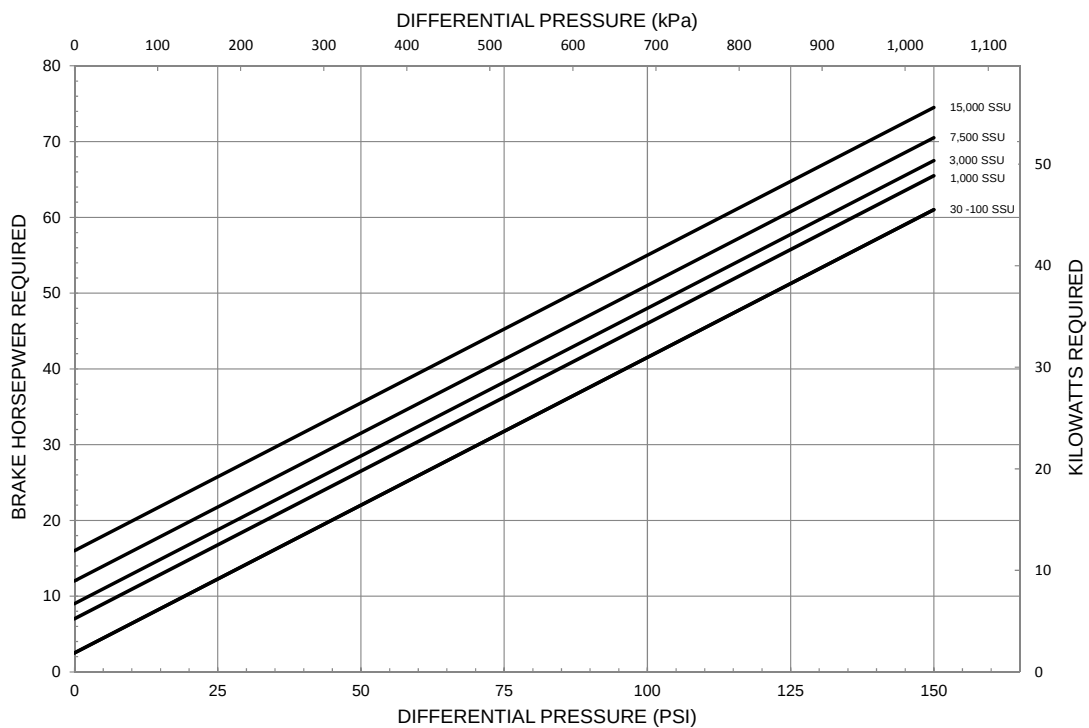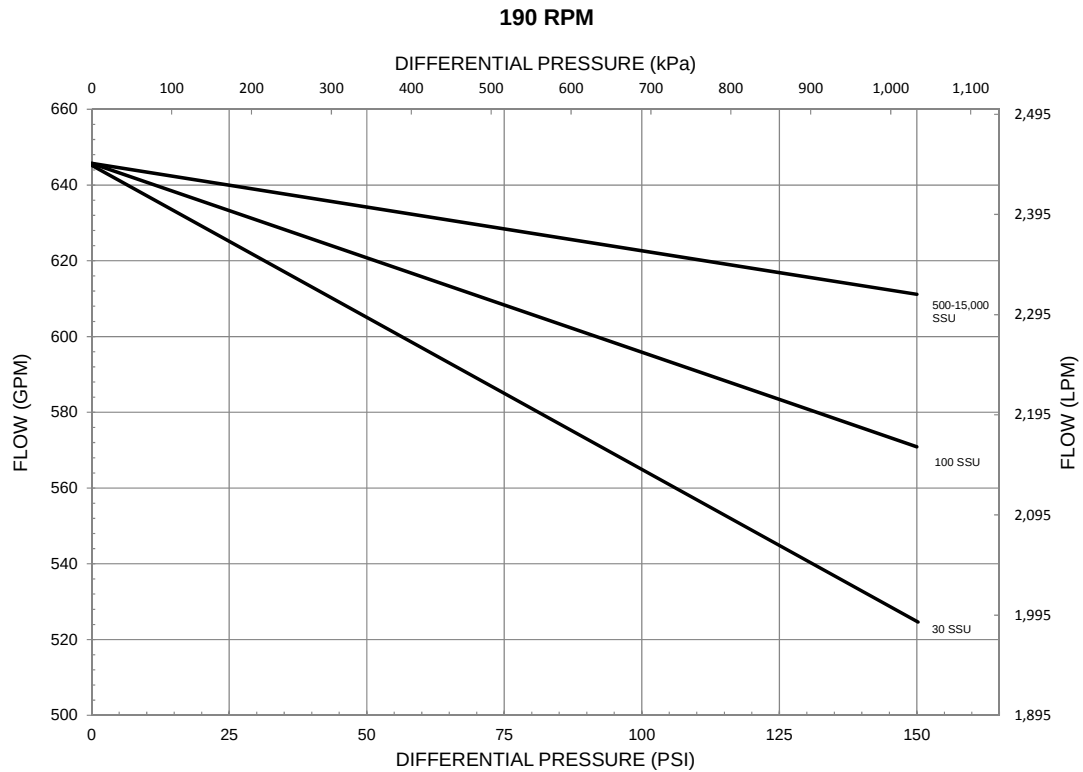

Use metal vanes above 20,000 SSU



Blackmer Characteristic Curves are based on Brake Horsepower (BHP). To determine Motor Horsepower, drive train inefficiencies must be added to the BHP.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.



## CHARACTERISTIC CURVES

Model: HXL8, HXLJ8

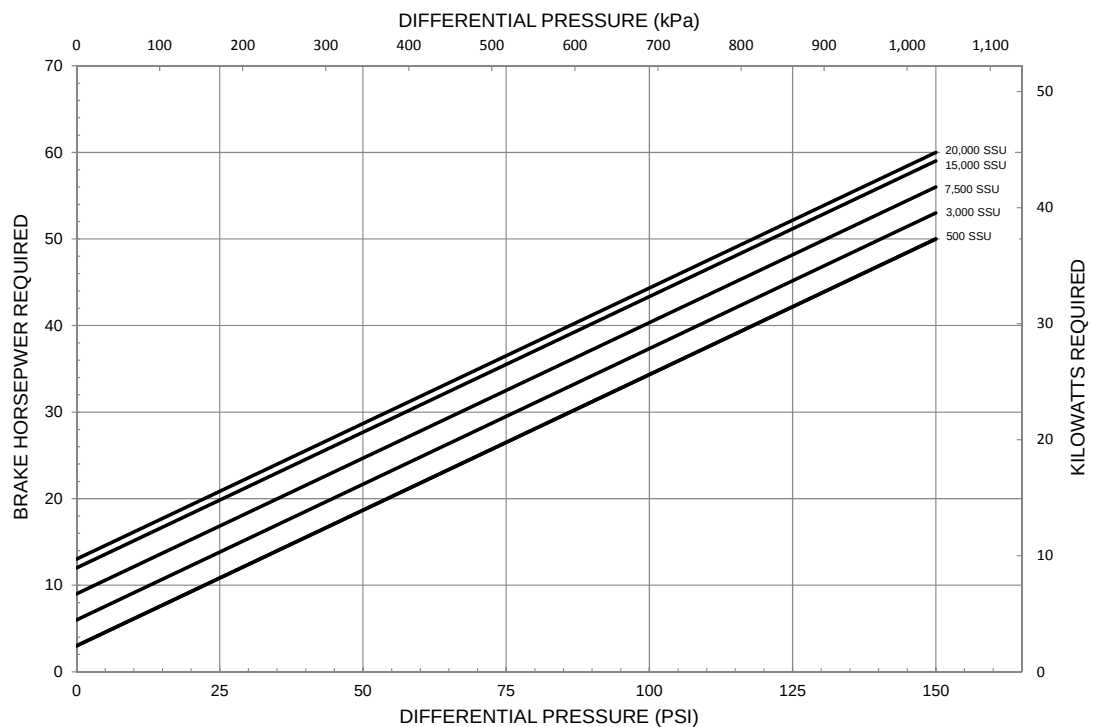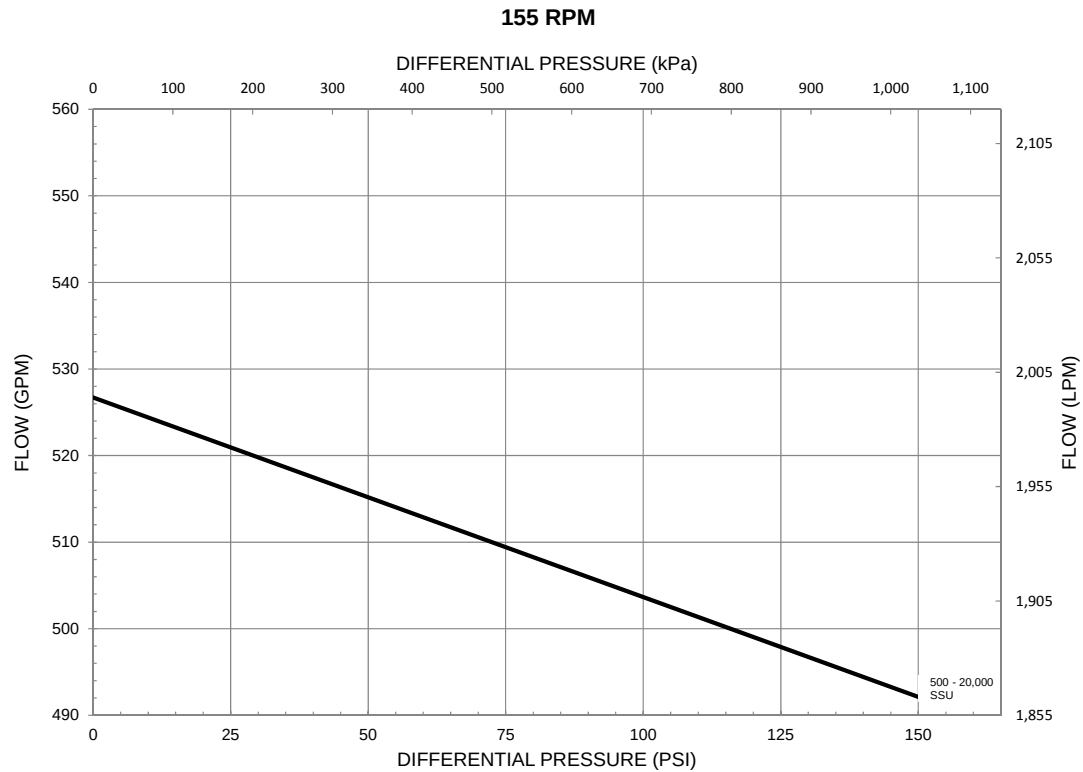

Use metal vanes above 20,000 SSU


Blackmer Characteristic Curves are based on Brake Horsepower (BHP). To determine Motor Horsepower, drive train inefficiencies must be added to the BHP.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.



## CHARACTERISTIC CURVES

Model: HXL8, HXLJ8

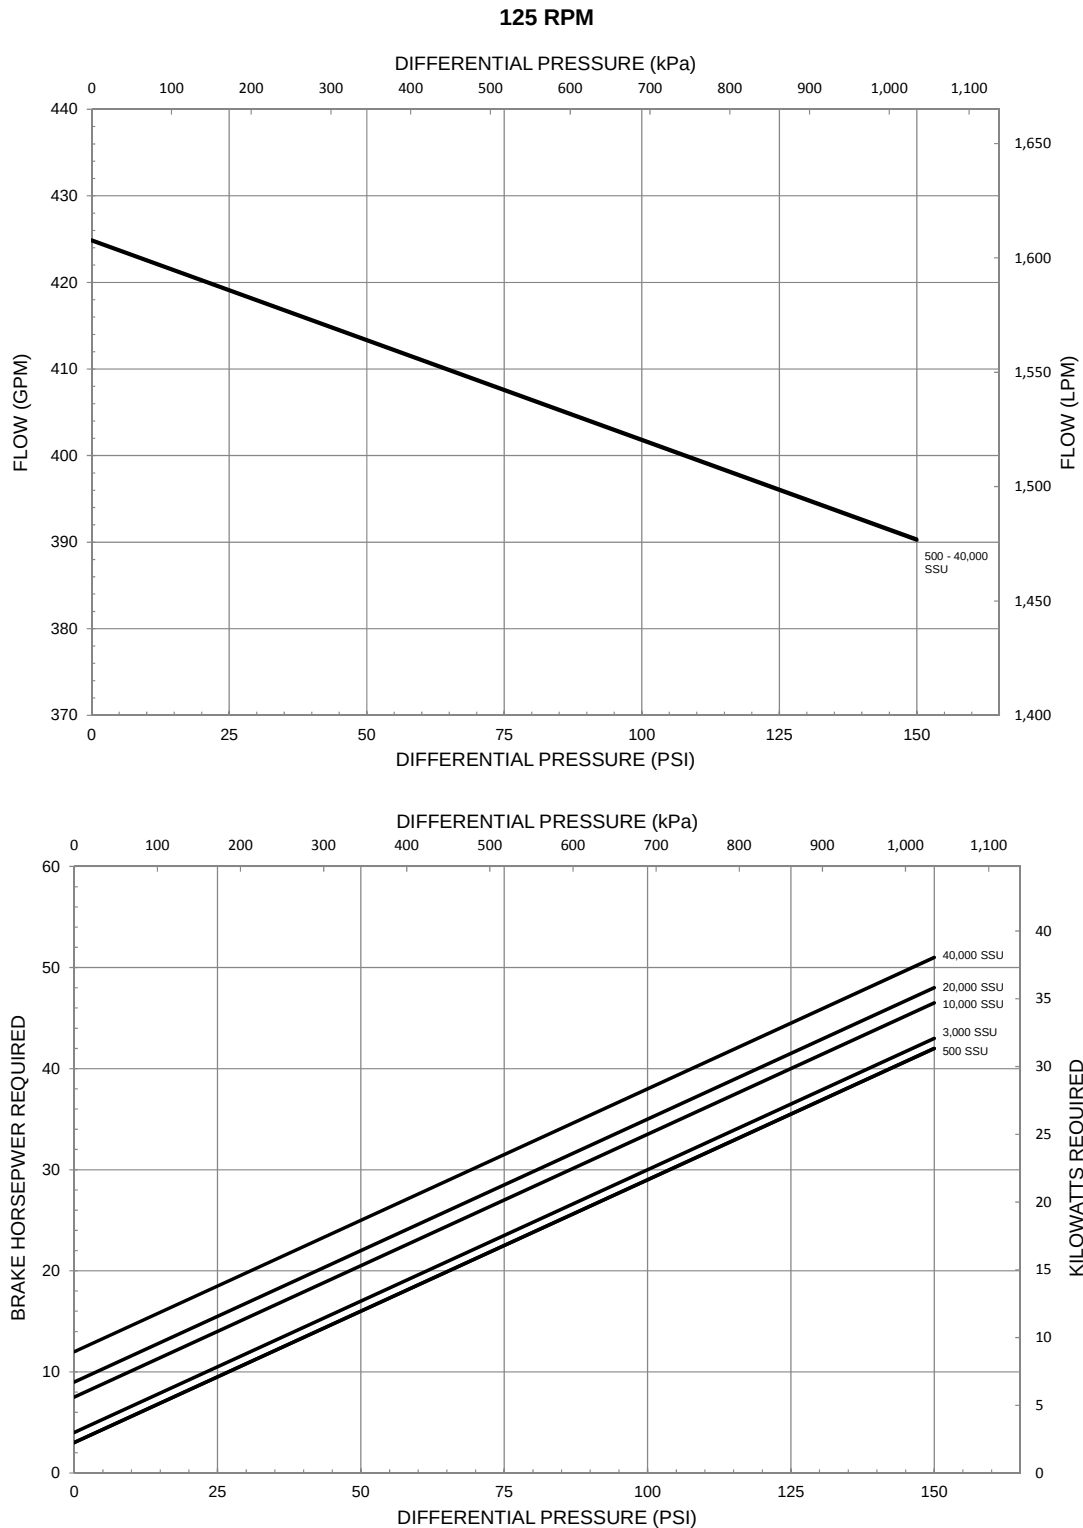

Use metal vanes above 20,000 SSU



Blackmer Characteristic Curves are based on Brake Horsepower (BHP). To determine Motor Horsepower, drive train inefficiencies must be added to the BHP.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.



## CHARACTERISTIC CURVES

Model: HXL8, HXLJ8

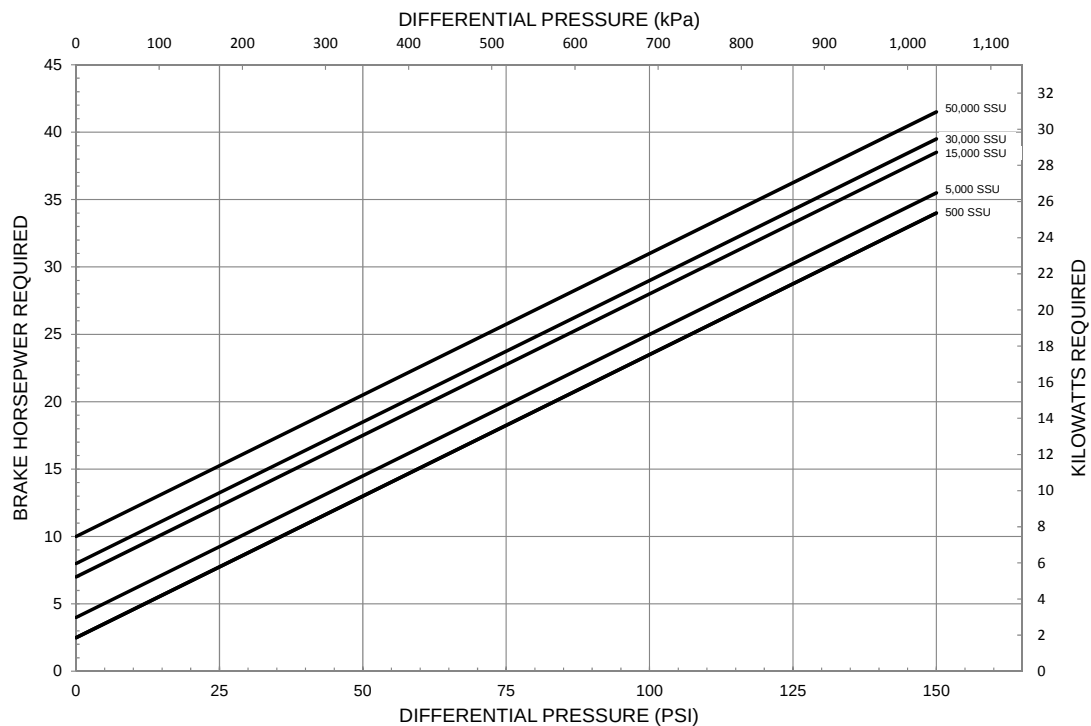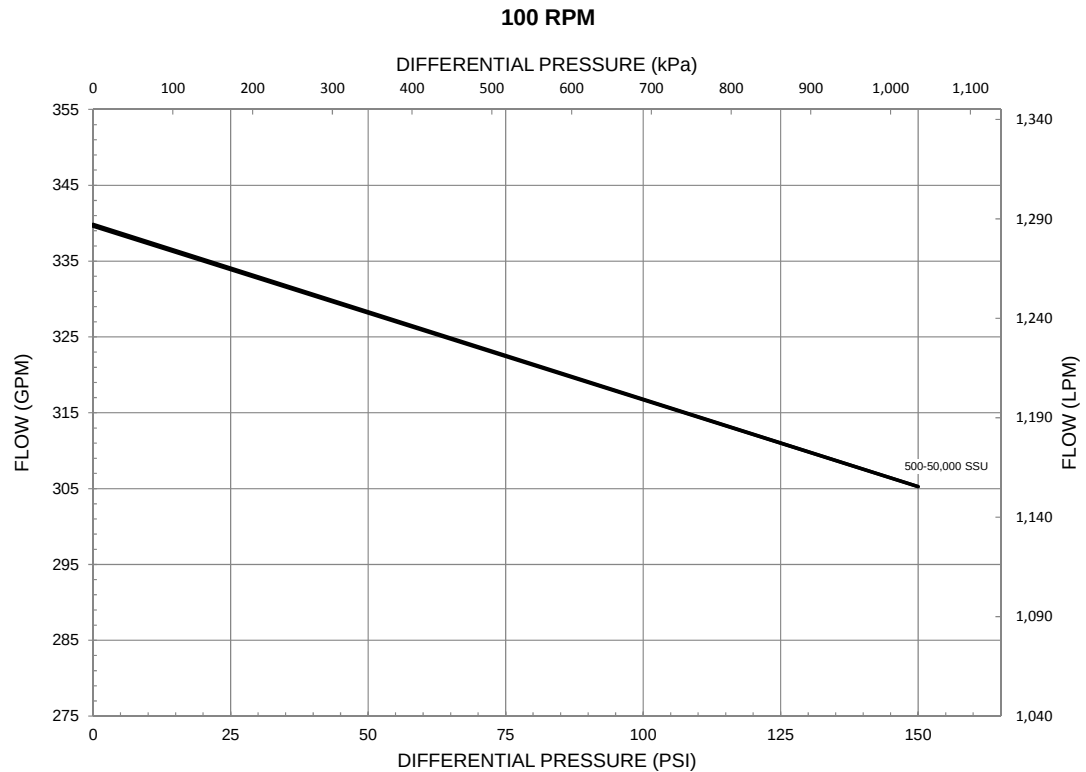

Use metal vanes above 20,000 SSU



Blackmer Characteristic Curves are based on Brake Horsepower (BHp). To determine Motor Horsepower, drive train inefficiencies must be added to the BHP.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.



## CHARACTERISTIC CURVES

Model: HXL8, HXLJ8

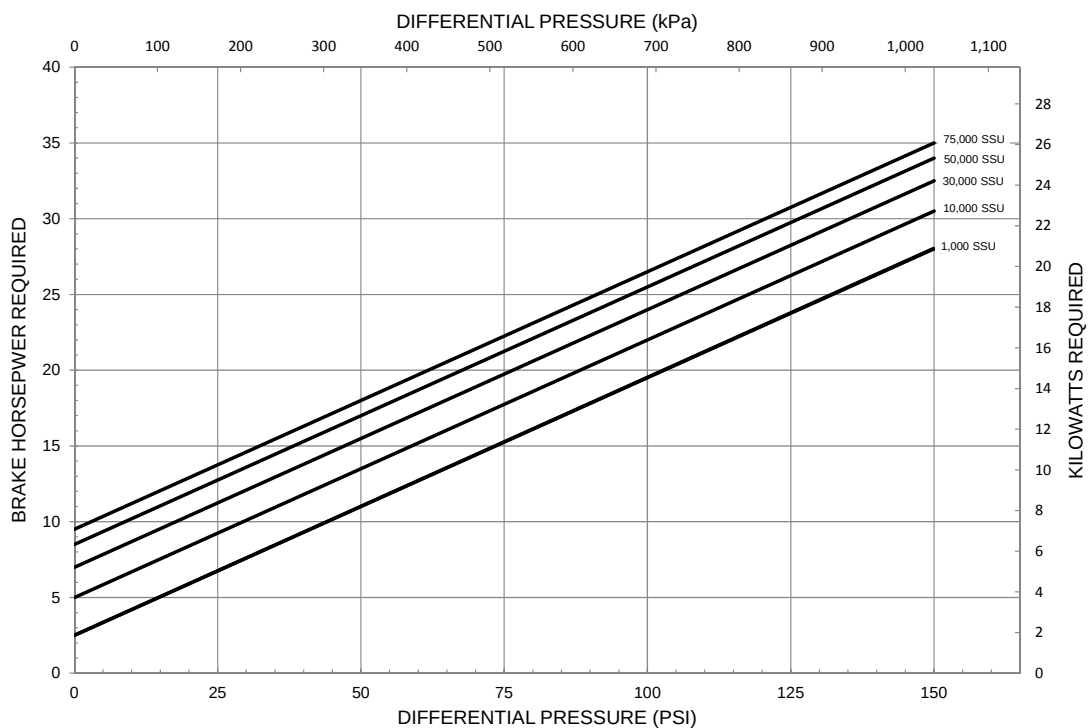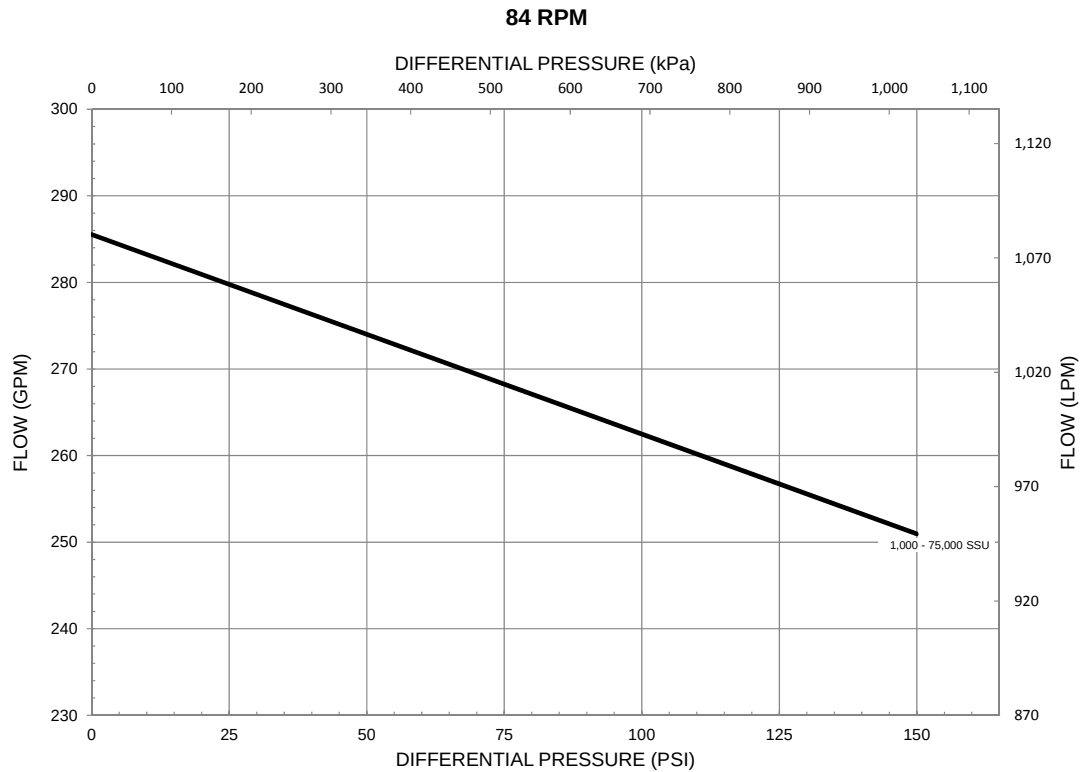

Use metal vanes above 20,000 SSU



Blackmer Characteristic Curves are based on Brake Horsepower (BHP). To determine Motor Horsepower, drive train inefficiencies must be added to the BHP.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.



## CHARACTERISTIC CURVES

Model: HXL8, HXLJ8

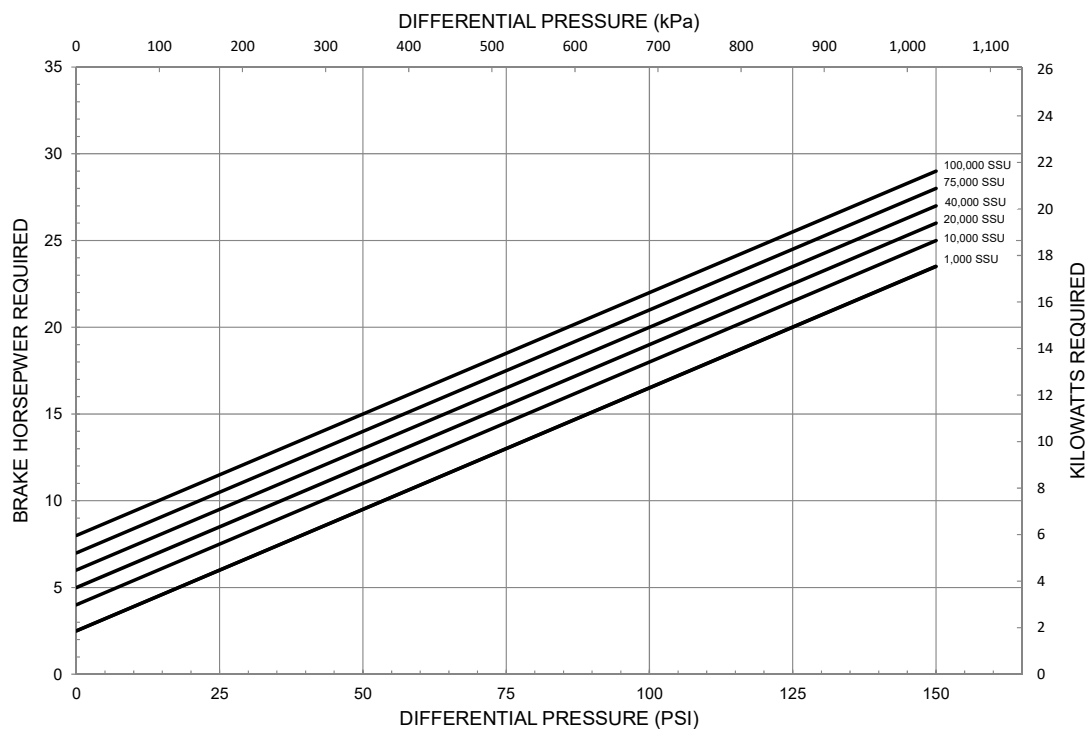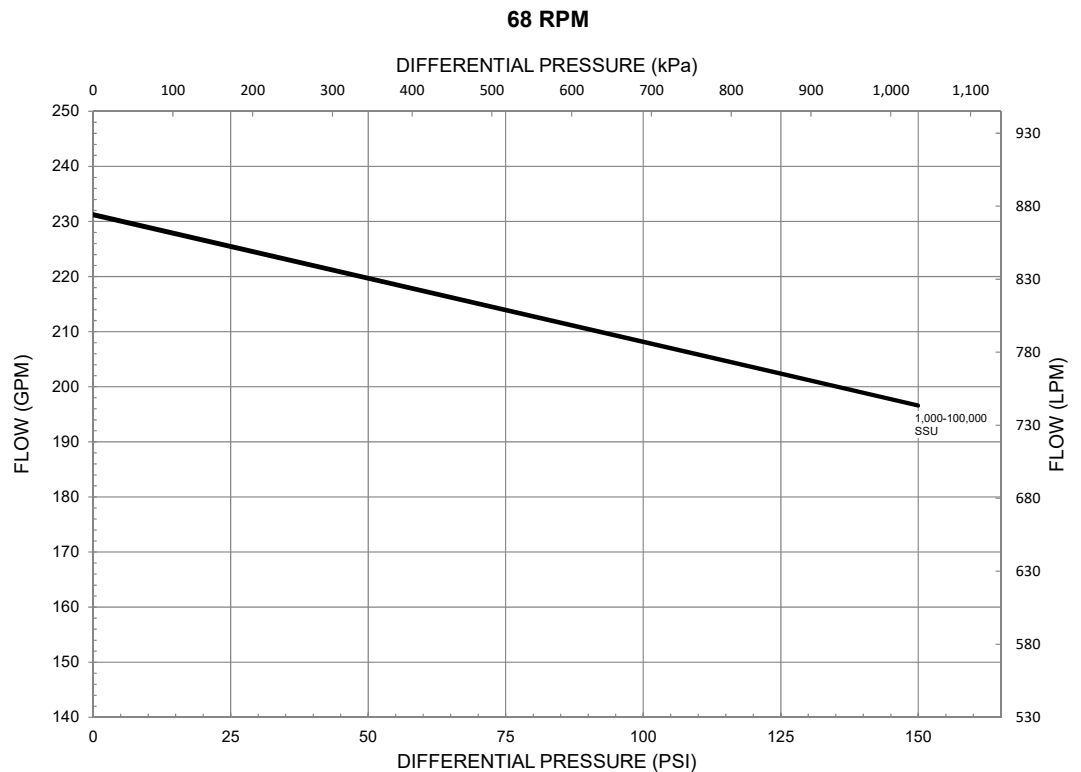

Use metal vanes above 20,000 SSU

Blackmer Characteristic Curves are based on Brake Horsepower (BHP). To determine Motor Horsepower, drive train inefficiencies must be added to the BHP.

Actual capacities are dependent upon the vapor pressure of the liquid and the inlet conditions of the system.